

SPECIFICATION SHEET

Ardito LED - A2SSF

2-1/2" Series

Ultra-Thin Profile Square Regressed Shower Trim

Project _____

Notes _____

Fixture Type _____

Date _____





A2SSF-11-XXX (illustrated)

Ultra-Thin Profile Square Regressed Shower Trim 2-1/2" high efficiency dimmable LED downlight. Offered in Remodel configuration (NON-IC), with optional mounting plate for new construction configuration (NON-IC) and new construction (IC).



SPECIFICATIONS

TRIM DETAILS	<p>Requires a 5" (127 mm) clearance beyond the ceiling level when used with remodel housing.</p> <p>Each part of the housing should be at LEAST 3" (76 mm) from insulation (non-IC configurations)</p> <p>Can fit in ceiling from 1/2" (12 mm) to 1-3/8" (35 mm) thick</p> <p>Accessible from below the ceiling for ease of maintenance.</p>
HEAT SINK	High quality injection molded aluminum heat sink ensuring maximum heat dissipation for optimal performance.
CEILING CUTOUT	<p>2-5/8" (67 mm) x 2-5/8" (67 mm)</p> <p>Included: Cardboard cutout template</p> <p>Optional: Reusable steel cutout template for square trim (TEMP-SQ)</p>
CERTIFICATION	<ul style="list-style-type: none"> cULus E343977 for wet locations Certified under California Energy Commission according to reference joint Appendix 8 (JA8-2016) Certified Air Tight ASTM E283
WARRANTY	<p>1 year on components against manufacturing defects</p> <p>5 years on LED arrays and drivers</p>

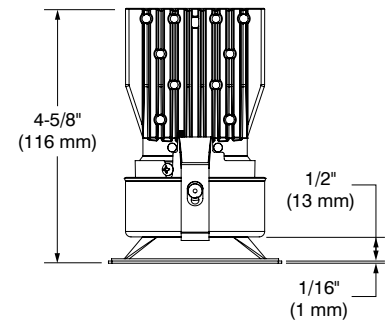**CONTRASTE**

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SPECIFICATION SHEET




Ardito LED - A2SSF

2-1/2" Series

Ultra-Thin Profile Square Regressed Shower Trim

SPÉCIFICATIONS (SUITE)

COMPATIBLE HOUSINGS

	Remodel Housing	Insulated Air Tight Housing (Title 24)		
Performance 1 (14W)	REA2V1	ICAT0S2-ARV1		

For dimming, please visit our Web site frequently to find our suggested compatible dimmers: www.contrastlighting.com

LIGHT ENGINE

STANDARD (SOLID WHITE)

Lumileds Luxeon CoB 1205 GEN3.

L₇₀ @ 50,000 hours of operation.

3-Step MacAdam ellipse (3 SDCM)

Color Temperatures: 2,700K - 3,000K - 3,500K - 4,000K

CRI: 90+ (93 typical)

R9: >50

Delivered Lumens: Performance 1 (14W) **with clear lens** - 976 lumens @ 3,000K, 68.7 lm/W

Performance 1 (14W) **with frosted lens** - 823 lumens @ 3,000K, 57.9 lm/W

Power Supply: 120V / 277V (universal input)

One driver available in performance 1 (14W) and offering 2 dimming options within the same unit:

ELV: 120V only


0-10V: 120V / 277V

Consult housing specification sheet for more details.

OPTIC SYSTEM

Interchangeable optional optical lenses available to customize your lighting.

Choice of available lenses:

Clear (C) 

Frosted (F)

Standard

Flood (L) — with clear lens	45°
Flood (L) — with frosted lens	49°

Average beam shown. Consult .ies files on our Web site for more details.

FLANGE AND REFLECTOR FINISHES

Powder coat painted or plated die formed steel.

Different finishes available:

24K Gold Plated **(-03)**, Chrome **(-04)**, Brushed Chrome **(-04BR)**, Matte White **(-11)**, Brushed Nickel **(-12BR)**, Satin Nickel **(-13)**, Matte Black **(-22)** and Polar Grey **(-25)**

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SPECIFICATION SHEET


Ardito LED - A2SSF

2-1/2" Series

Ultra-Thin Profile Square Regressed Shower Trim



CODIFICATION EXAMPLE

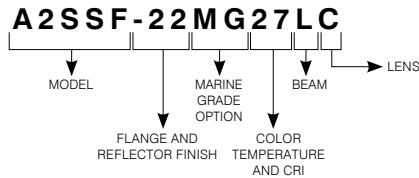


ORDERING CODES **A2SSF**

MODEL	FLANGE AND REFLECTOR FINISHES	MARINE GRADE	COLOR TEMPERATURES AND CRI	BEAMS	LENSES
A2SSF				L	
A2SSF	-03 24K Gold Plated	MG (optional)	27 2,700K (90+ CRI)	L Flood with clear lens (45°)	C Clear
	-04 Chrome	May be applied on finishes: -11, -22 and -25	30 3,000K (90+ CRI)	Flood with frosted lens (49°)	F Frosted
	-04BR Brushed Chrome		35 3,500K (90+ CRI)		
	-11 Matte White		40 4,000K (90+ CRI)		
	-12BR Brushed Nickel				
	-13 Satin Nickel				
	-22 Matte Black				
	-25 Polar Grey				

REUSABLE TEMPLATE OPTION

Reusable steel cutout template for square trim

Code: **TEMP-SQ**



CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Ardito LED - A2SSF

2-1/2" Series


Ultra-Thin Profile Square Regressed Shower Trim

PHOTOMETRIC DATA



3,000K, 90+ CRI, Flood, performance 1 — WITH CLEAR LENS

CANDLEPOWER DISTRIBUTION



LIGHT CONE

Distance	FC	DIA
06'	50.9	5.0
08'	28.6	6.7
10'	18.3	8.3
12'	12.7	10.0
14'	9.3	11.7
16'	7.2	13.4

Beam: 45°
Beam Edge defined as 50% of Maximum Nadir Candle-power.

LUMINAIRE

Performance 1 LED	3,000K Flood
CBCP / Lumens	1,832 / 976
Watts	120V 277V 14.2W 14.7W
Operating AMPS	0.12A 0.053A
Lumen Maintenance	L70 @ 50,000 Hrs
CRI	90+
Lumens/Watt	68.7
Spacing Criteria	0.99

COEFFICIENT OF UTILIZATION - %

Ceiling Reflect %	80	50	30
Wall Reflect %	50	30	50
RCR	0	119	119
	111	111	106
	106	98	96
	98	98	87
	87	88	87
	80	82	79
	76	76	72
	66	70	66

Zonal Cavity Method
Effective Floor Cavity Reflectance 20%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	889.2	91.1%
0-40	972.2	99.9%
0-60	975.6	100%
60-90	0.4	0%
0-90	976	100%

MULTIPLE UNIT DATA - (RCR 2)

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/ SQ. FT.
5'	46	0.63
6'	26	0.35
7'	18	0.25
8'	18	0.25
9'	11	0.16


38' x 38' x 10' Room. Workplan located 2-1/2' (30").
Reflectance factor 80%/50%/30%

CANDELAS DISTRIBUTION

DEGREES/ VERTICAL	CANDELAS	DEGREES/ VERTICAL	CANDELAS
0	1,832	40	14
5	1,793	50	1
10	1,666	60	0
15	1,440	70	0
20	1,119	80	0
25	737	90	0
30	370		

3,000K, 90+ CRI, Flood, performance 1 — WITH FROSTED LENS

CANDLEPOWER DISTRIBUTION



LIGHT CONE

Distance	FC	DIA
06'	28.2	5.5
08'	15.9	7.3
10'	10.2	9.1
12'	7.1	11.0
14'	5.2	12.8
16'	4.0	14.6

Beam: 49°
Beam Edge defined as 50% of Maximum Nadir Candle-power.

LUMINAIRE

Performance 1 LED	3,000K Flood
CBCP / Lumens	1,055 / 823.0
Watts	120V 277V 14.2W 14.7W
Operating AMPS	0.17A 0.075A
Lumen Maintenance	L70 @ 50 000 Hrs
CRI	90+
Lumens/Watt	57.9
Spacing Criteria	0.77

COEFFICIENT OF UTILIZATION - %

Ceiling Reflect %	80	50	30
Wall Reflect %	50	30	50
RCR	0	119	119
	111	111	106
	106	93	91
	93	93	87
	87	84	79
	79	79	72
	68	66	60
	58	58	53

Zonal Cavity Method
Effective Floor Cavity Reflectance 20%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	543.7	66.1%
0-40	689.7	83.8%
0-60	790.8	96.1%
60-90	32.2	3.9%
0-90	823.0	100%

MULTIPLE UNIT DATA - (RCR 2)

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/ SQ. FT.
5'	37	0.59
6'	21	0.33
7'	14	0.23
8'	14	0.23
9'	9	0.15

38' x 38' x 10' Room. Workplan located 2-1/2' (30").
Reflectance factor 80%/50%/30%

CANDELAS DISTRIBUTION

DEGREES/ VERTICAL	CANDELAS	DEGREES/ VERTICAL	CANDELAS
0	1,055	40	145
5	1,016	50	51
10	930	60	26
15	805	70	15
20	653	80	5
25	494	90	0
30	346		