

# ISA4R-ISA4S

4" Series - Ardito


Insulated Housing

Project \_\_\_\_\_


Notes \_\_\_\_\_

Fixture type \_\_\_\_\_





Date \_\_\_\_\_

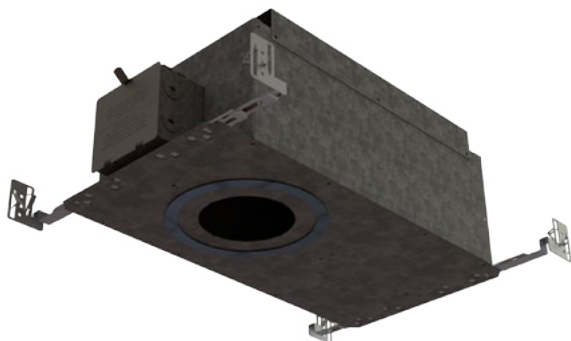

ISA4R (illustrated)

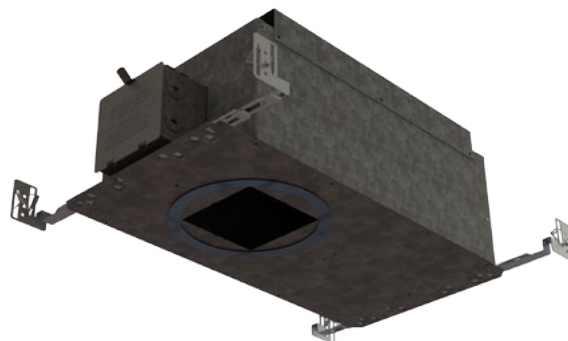

ISA4S (illustrated)

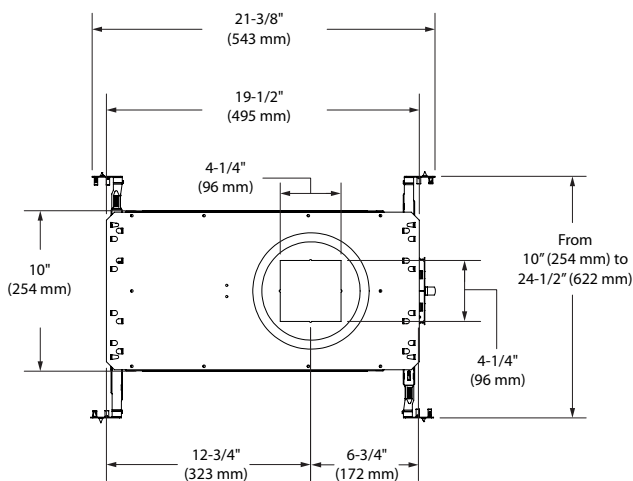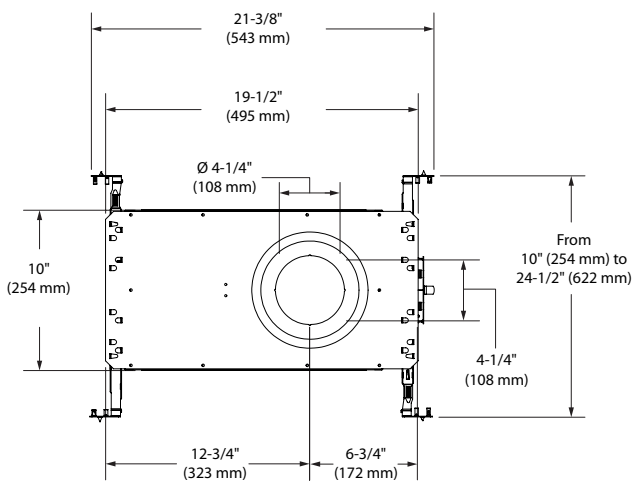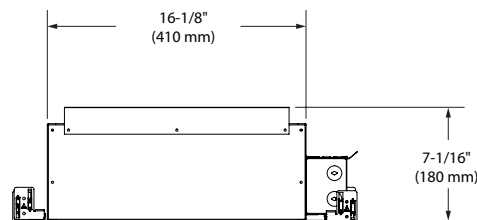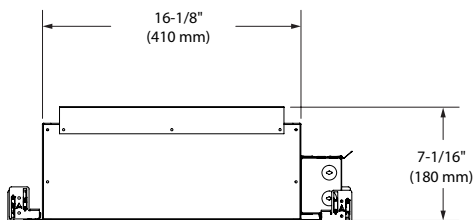

# CONTRASTE

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624  
Fax.: 1-877-839-7057  
contrastlighting.com  
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# ISA4R-ISA4S

4" Series - Ardito

Insulated Housing



## SPECIFICATIONS

**HOUSING DETAILS** Galvanized steel and aluminum housing to optimize heat dissipation, of a thickness up to 18 gauge (0.051" / 1,3 mm).  
Junction box can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires).  
Below-ceiling accessible.  
Can be installed in insulated ceilings, except polyurethane.

**MOUNTING** **Round Cutout Diameter: Ø 4-1/4" (108 mm)**  
**Square Cutout Diameter: 4-1/4" (108 mm) x 4-1/4" (108 mm)**  
Perfect fit to ceiling.  
Can fit in ceilings up to 1-1/2" (38 mm) thick.  
Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceiling structures.

**PERFORMANCE** **Performance 1:** Up to 1,300 lumens (14W)  
**Performance 2:** Up to 1,900 lumens (23W)  
**Lumenetix:** Up to 700 lumens (12.5W)

**POWER** 120V - 277V

**DIMMING** 2 types of dimming offered:  
• Electronic Low Voltage (ELV) (120V only)  
• 0-10V (120V only)  
Due to constant evolution of dimmers, we must test them regularly.  
We invite you to consult frequently our Web site to find our dimmer compatibility list: [www.contrastlighting.com](http://www.contrastlighting.com)

COMPATIBLE TRIMS	ISA4R (round aperture)			ISA4S (square aperture)			Ceiling thickness suggested for insulated housing with Lumenetix option.
	Performance 1 14W	Performance 2 23W	Lumenetix CT-WD	Performance 1 14W	Performance 2 23W	Lumenetix CT-WD	
	* A4RFR A4RAF	* A4RFR A4RAF	*** A4RFR A4RAF	* A4SFR * A4SAR	* A4SFR * A4SAR	*** A4SFR *** A4SAR	* Ceiling thickness must be 1/4" (6 mm) for insulated housing with Lumenetix option.
	* A4RAR ** A4RWW * A4RSF	* A4RAR ** A4RWW * A4RSF	*** A4RAR **** A4RWW	** A4SWW * A4SSF	** A4SWW * A4SSF	**** A4SWW	** Ceiling thickness must be 1/2" (13 mm) for insulated housing with Lumenetix option.
							*** Ceiling thickness must be 3/4" (19 mm) for insulated housing with Lumenetix option.
							**** Ceiling thickness must be 1" (25 mm) for insulated housing with Lumenetix option.

**CERTIFICATION** • cULus **E343977** for damp and wet locations  
• Chicago Plenum (optional)

**WARRANTY** 5 years on LED driver.

# CONTRASTE

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624  
Fax.: 1-877-839-7057  
contrastlighting.com  
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.


# ISA4R-ISA4S

4" Series - Ardito

Insulated Housing



CODIFICATION EXAMPLE

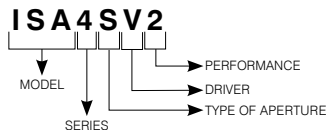



ORDERING CODE

MODEL	SERIES	TYPE OF APERTURE	DRIVER	PERFORMANCE	COMPLIANCE OPTION
<b>ISA</b>	<b>4</b>		<b>V</b>		
<b>ISA</b> Ardito Insulated Housing	<b>4</b> 4" Series	<b>R</b> Round <b>S</b> Square	<b>V</b> ELV / 0-10V	<b>1</b> 1,300 lumens <b>2</b> 1,900 lumens <b>L</b> WD or CT	<b>X</b> Standard Chicago Plenum

WD: Warm Dimming  
 CT: Color Tuning

MUD-IN-PLATE OPTION

Code: MIPA4R (round)  
 MIPA4S (square)

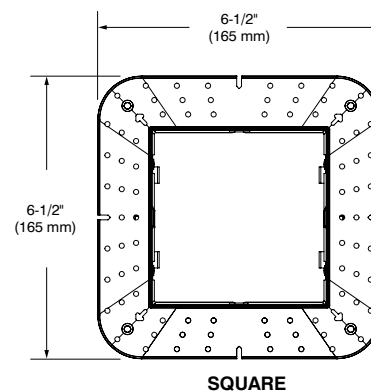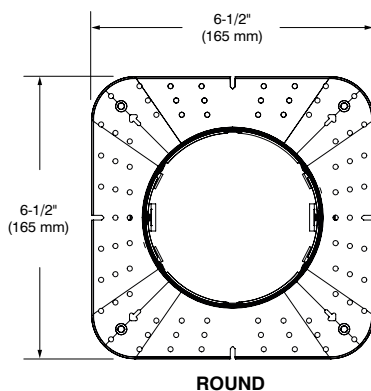

# CONTRASTE

1009, rue du Parc Industriel  
 Lévis (Québec) G6Z 1C5 Canada  
 Tel.: 1-888-839-4624  
 Fax.: 1-877-839-7057  
 contrastlighting.com  
 info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.  
 All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.