


SPECIFICATION SHEET

3 1/2" 3000 SERIES

IT3000E IT3000E2

REMODEL HOUSING WITH
ELECTRONIC CONVERTER

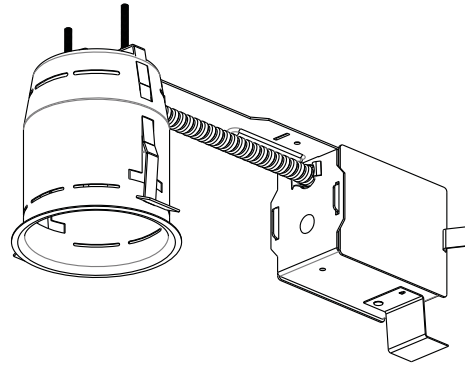

YES

Damp Location



MR16 50W MAX

MR16



Voltage

IT3000E: 120 VOLTS (CAN & USA.)
IT3000E2: 277 VOLTS (USA.)



Electronic converter 120V / 12V



Thermal Protector

T°C 120°C No 031



OD Cut

3 5/8" (92mm)




UL US LISTED

E174023




Dimensions

Overall Dimensions :
Length : 13 5/16" (338mm)
Width : 4 5/8" (118mm)
Height : 6" (152mm)

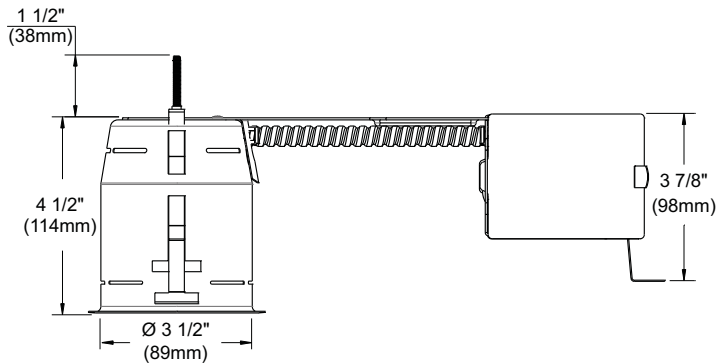

COMPATIBLE TRIMS

37W MR16		42W MR16		50W MR16	
R3171	T3145DG	T3000	T3200	T3145	T3450
R3450D	T3250DG	T3100	T3250	T3145D	T3450D
R3470	T3671	T3125	T3260	T3400	T3500
R3470D		T3300		T3400D	T3500D

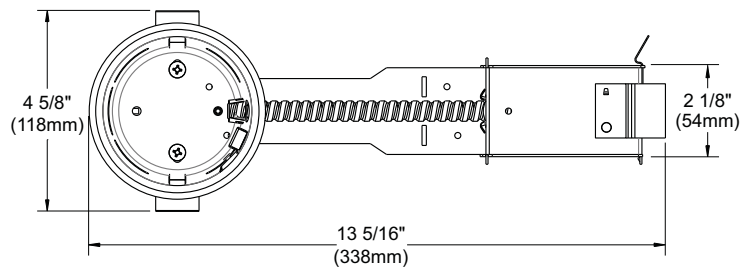

TECHNICAL SPECIFICATIONS

0,051" (1,3mm) thickness Galvanized Steel.
Below-ceiling accessible.
Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
Takes up to 7/8" thick ceiling.
Perfect fit into ceiling.
No light leak.
Each part of the case should be at 3 "(76mm) MINIMUM from insulation (if applicable).



Your representative : _____

Your project : _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN, G6Z1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

DECEMBER 2010