








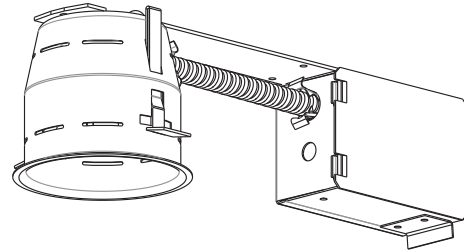

SPECIFICATION SHEET



3" 4000 SERIES

IT4000CE IT4000CE2

SHALLOW REMODEL HOUSING WITH ELECTRONIC CONVERTER



	YES
Damp Location	
	MR16 20W MAX
MR16	
	Electronic Converter 120V/12V Electronic Converter 277V/12V
	120 VOLTS (CAN & USA) 277 VOLTS (USA)
Voltage	
	T°C 120°C No 031
Thermal Protector	
	3 1/4" (82mm)
OD Cut	
	E174023
UL LISTED	
	Overall Dimensions : Length : 11 1/8" (283mm) Width : 4 1/4" (108mm) Height : 3 1/4" (82mm)
Dimensions	

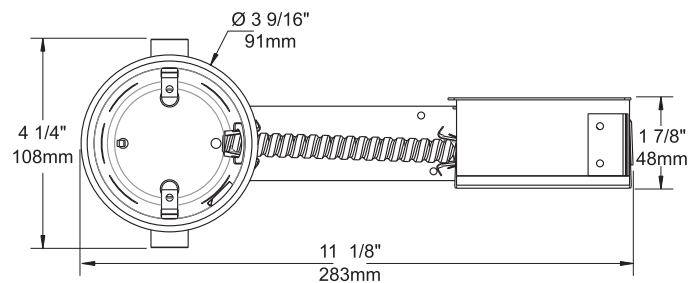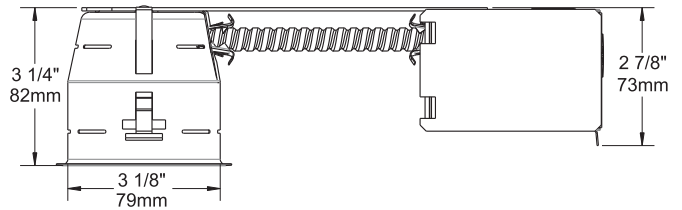

COMPATIBLE TRIMS

MR16 20W

- T4000
- T4125
- T4200
- T4200V
- T4210V
- T4300

TECHNICAL SPECIFICATIONS

0,021" (0,53mm) thickness Galvanized Steel.
 Below-ceiling accessible.
 Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
 Takes up to 7/8" thick ceiling.
 Perfect fit into ceiling.
 No light leak.
 Each part of the case should be at 3 "(76mm) MINIMUM from insulation (if applicable).



Your representative : _____

Your project : _____