

SPECIFICATION SHEET

NWA3R-NWA3S

3.5" Series - Ardito


New Construction Housing

Project _____


Notes _____

Fixture type _____





Date _____

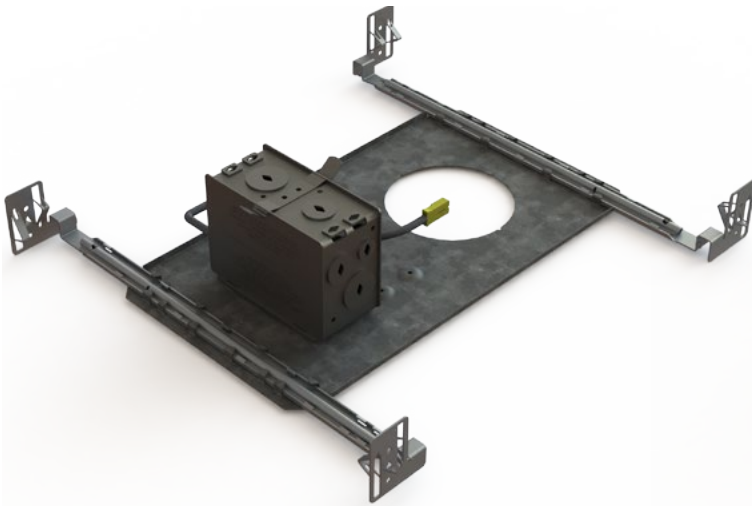

NWA3R (illustrated)

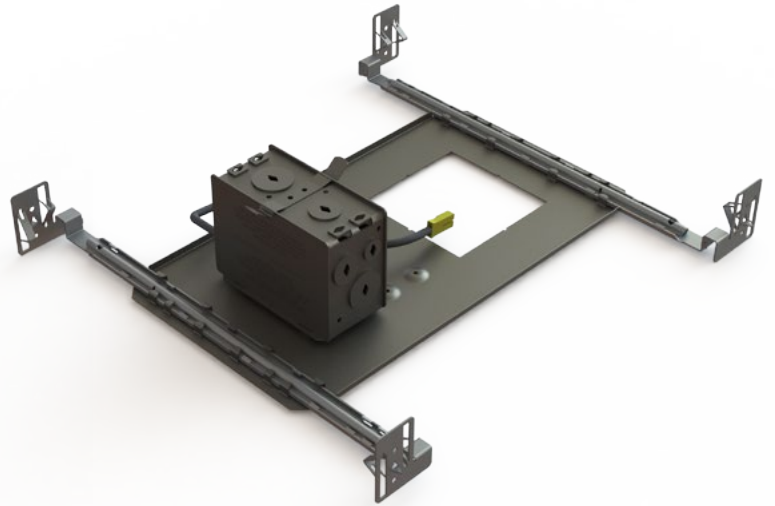

NWA3S (illustrated)

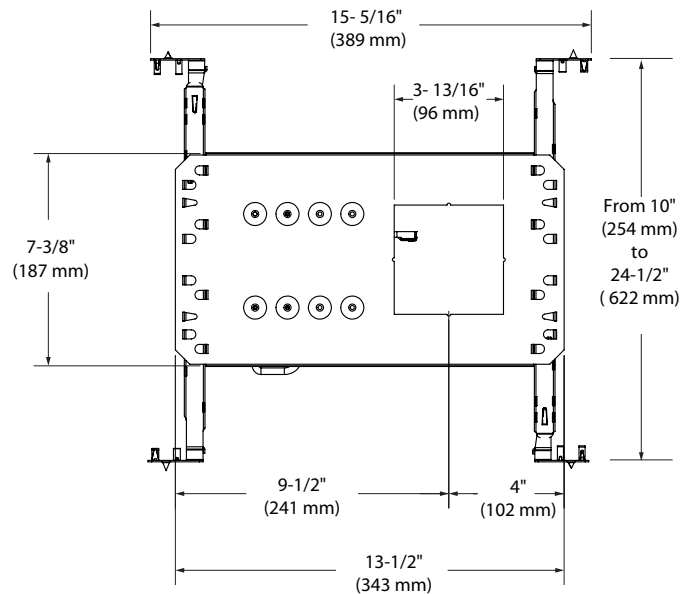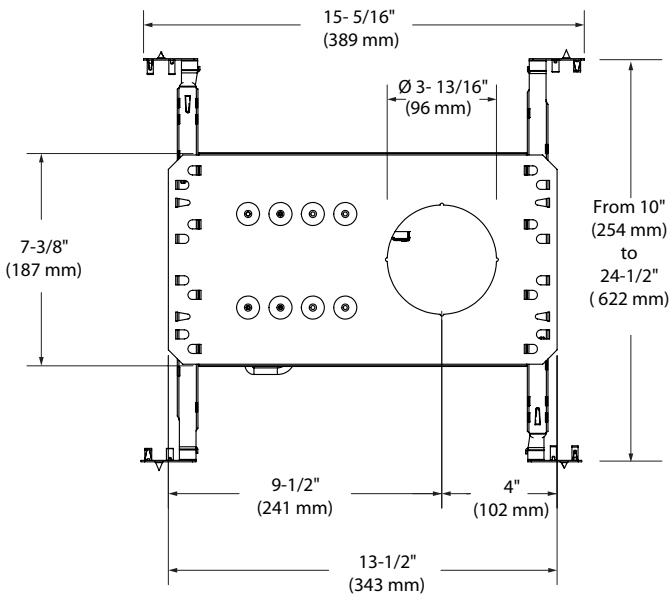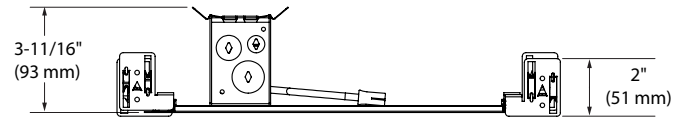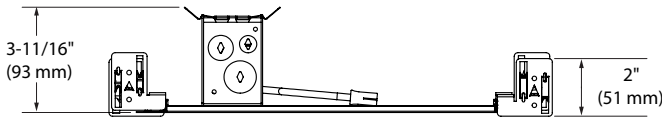

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

NWA3R-NWA3S

3.5" Series - Ardito**New Construction Housing**

SPECIFICATIONS

HOUSING DETAILS	Galvanized steel housing. Junction box can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires). Below-ceiling accessible.					
MOUNTING	Round Cutout diameter: Ø 3-3/4" (95 mm) Square Cutout diameter: 3-3/4" (95 mm) x 3-3/4" (95 mm) The ceiling level determined by the choice of trims. Insulation material must be kept at least 3" (76 mm) away from the fixture. Can fit in ceilings up to 1-1/2" (38 mm) thick. Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceiling structures.					
PERFORMANCE	Performance 1: Up to 1,300 lumens (14W) Performance 2: Up to 1,900 lumens (23W) Lumenetix: Up to 700 lumens (12.5W)					
POWER	120V - 277V					
DIMMING	2 types of dimming offered: <ul style="list-style-type: none"> • Electronic Low Voltage (ELV) (120V only) • 0-10V (120V only) Due to constant evolution of dimmers we must test them regularly. We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com					
COMPATIBLE TRIMS	NWA3R (round aperture)			NWA3S (square aperture)		
	Performance 1	Performance 2	Lumenetix	Performance 1	Performance 2	Lumenetix
	14W	23W	CT-WD	14W	23W	CT-WD
	A3RFR	A3RFR	A3RFR	A3SFR	A3SFR	A3SFR
	A3RAF	A3RAF	A3RAF	A3SAR	A3SAR	A3SAR
	A3RAR	A3RAR	A3RAR	A3SWW	A3SWW	A3SWW
	A3RWW	A3RWW	A3RWW	A3SSF	A3SSF	
	A3RSF	A3RSF	A3RFD			
	A3RFD	A3RFD				
CERTIFICATION	cULus E343977 for damp and wet locations					
WARRANTY	5 years on LED driver					

CONTRASTE

1009, rue du Parc Industriel
 Lévis (Québec) G6Z 1C5 Canada
 Tel.: 1-888-839-4624
 Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
 All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.


NWA3R-NWA3S

3.5" Series - Ardito

New Construction Housing



CODIFICATION EXAMPLE

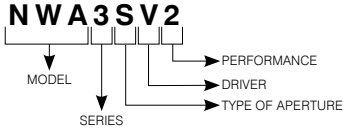

ORDERING CODE

MODEL	SERIES	TYPE OF APERTURE	DRIVER	PERFORMANCE
NWA	3		V	
NWA Ardito New Construction Housing	3 3" Series	R Round S Square	V ELV / 0-10V	1 1,300 lumens 2 1,900 lumens L WD or CT

WD: Warm Dimming
 CT: Color Tuning

MUD-IN-PLATE OPTION

Code: MIPA3R (round)
 MIPA3S (square)

