

PROF60

6" Profilux Series

Complete Unit: LED Round Downlight Trim including the Junction Box and Driver

Project _____

Notes _____

Fixture Type _____

Date _____





PROF60-11xx (illustrated)

Recessed ultra-thin Air Tight LED trim for insulated ceiling and suitable for wet locations. The thin profile with spring clips allows for quick and easy installation. Ideal for confined spaces.

SPECIFICATIONS

COLOR TEMPERATURES	3,000K and 4,000K
CRI	80+
LED MODULE	Epistar 2835
VOLTAGE	120 VAC
POWER	12 Watts
POWER FACTOR	>85%
LUMEN OUTPUT	Up to 1,050 lumens, 87 lm/W
LIFESPAN	L70 @ 50,000 hours
TRIM	Thin profile 1-1/8" (28 mm) Matte White (-11) or Brushed Nickel (-12BR) available. Packaged with a plastic protection film on the bottom face to ensure ease of installation.
BEAM	Very Wide Flood → 110°
WIRE TYPE	FT4
MOUNTING	The space required beyond ceiling material is 1-1/2" (38 mm). The maximal thickness of the ceiling is 1" (25 mm). Beyond this thickness, springs will apply less pressure between the trim and the ceiling. The base of the trim will thus have some difficulty to sit flush with the ceiling.

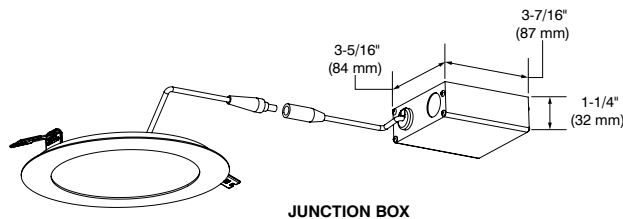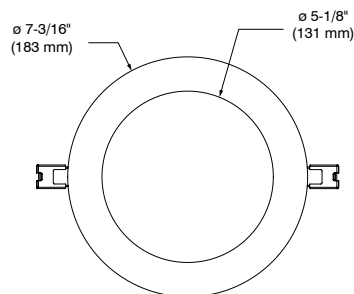

PROF60

6" Profilux Series


Complete Unit: LED Round Downlight Trim including the Junction Box and Driver



SPECIFICATIONS (CON'T)

CEILING CUTOUT	ø 6-1/4" (159 mm) MIN ø 6-1/8" (156 mm) / MAX ø 7" (178 mm)
JUNCTION BOX	Junction box with independent auxiliary connection and keyholes for fixing to the structure. Includes driver with factory assembled triple push-in connectors. Also provided with 1 complimentary 1/2" (13 mm) strain relief connector for non-metallic sheathed cable as well as 2 screws and anchors for fixation.
DIMMING	Compatible with Electronic Low Voltage (ELV) and Incandescent (TRIAC) dimmers. We invite you to consult frequently our Web site to find our suggested compatible dimmers list: www.contrastlighting.com
OPTIONS	<ul style="list-style-type: none"> • 6' (2 m) and 20' (6 m) cables (see ordering code) • Mounting Plates (see ordering code) • Goof Rings (see ordering code)
CERTIFICATION	<ul style="list-style-type: none"> • Certified ETL for wet locations and insulated ceilings (type IC) • Certified ASTM E283 Air Tight • Certified Energy Star®
WARRANTY	5-year warranty

CODIFICATION EXAMPLE

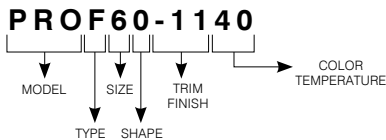

ORDERING CODES

MODEL	TYPE	SIZE	SHAPE	TRIM FINISHES	COLOR TEMPERATURES
PRO	F	6	0		
PRO Profilux	F Downlight	6 6 inches	0 Round	-11 Matte White -12BR Brushed Nickel	30 3,000K 40 4,000K

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

PROF60


6" Profilux Series

Complete Unit: LED Round Downlight Trim including the Junction Box and Driver




MOUNTING PLATES OPTION

Code: P6RN (without bars)
P6RNW (with bars)

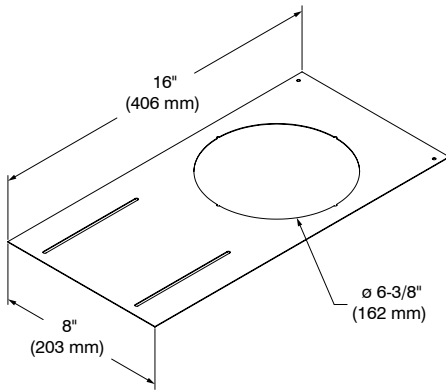

P6RN

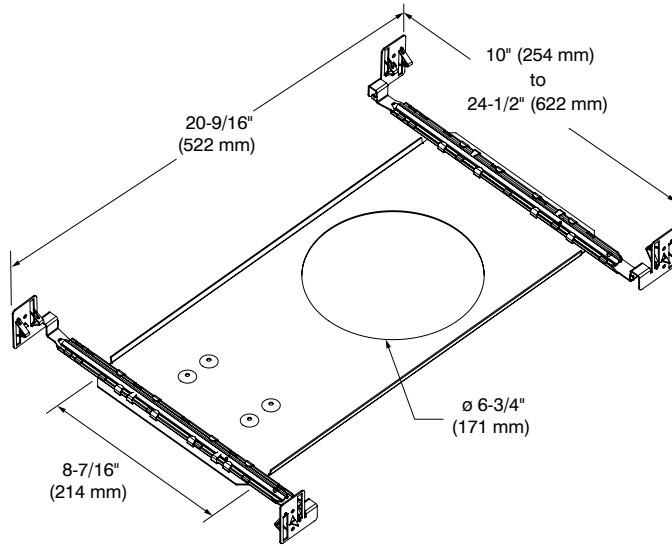

P6RNW

GOOF RINGS OPTION

Code: RR6-11 (Matte White)
RR6-12BR (Brushed Nickel)

Outside diameter: \varnothing 8" (203 mm)
 Inside diameter: \varnothing 6-3/8" (162 mm)

CABLES OPTION

Code: PRO-CBL6 (6' (2 m))
PRO-CBL20 (20' (6 m))

CONTRASTE

1009, rue du Parc Industriel
 Lévis (Québec) G6Z 1C5 Canada
 Tel.: 1-888-839-4624
 Fax.: 1-877-839-7057
 contrastlighting.com
 info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
 All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.