

REUR3

3-1/2" URBAĪ Series IC and Air Tight Remodel Housing





Project _____

Notes _____

Fixture Type _____

Date _____

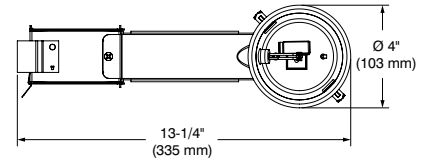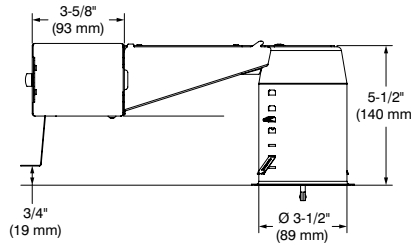

SPECIFICATIONS



HOUSING DETAILS	MOUNTING	PERFORMANCE	VOLTAGE
<p>Up to 0,051" (1,3 mm) thick galvanized steel housing. Approved for installation in insulated ceilings and in direct contact with insulating material (except polyurethane) on performance 1 only.</p> <p>19-1/2 in³ junction box. Below-ceiling accessible.</p>	<p>Cutout diameter: ø 3-3/4" (95 mm)</p> <p>Can fit ceilings up to 1-1/4" (32 mm) thick.</p> <p>Requires a 7" (178 mm) clearance beyond the ceiling level.</p> <p>Snap-in hooks for ease of installation and a perfect fit to ceiling.</p> <p>No light leakage.</p>	<p>1: 10W IC - up to 1,018 lms 2: 15W Non-IC - up to 1,326 lms Warm Dimming: 15W - up to 650 lms</p>	<p>120 Volts 277 Volts</p>
DIMMING	COMPATIBLE TRIMS	CERTIFICATION	WARRANTY
<p>ELV: 120V only 0-10V: Sourcing driver (Sinking Control) 120V or 277V</p> <p>We invite you to consult frequently our Website to find our dimmer compatibility list: www.contrastlighting.com</p>	<p>UR3A, UR3B, UR3C, UR3E, UR3F, UR3G, UR3H, UR3J.</p>	<ul style="list-style-type: none"> cULus E343977 for damp locations; wet with shower trim only. ASTM E283 	<p>1 year on components against manufacturing defects.</p> <p>5 years on LED arrays and drivers.</p>

SPECIFICATION SHEET

REUR3

3-1/2" URBAĪ Series**IC and Air Tight Remodel Housing****MOUNTING PLATE**

Code: P3RN (without bars)
P3RNW (with bars)

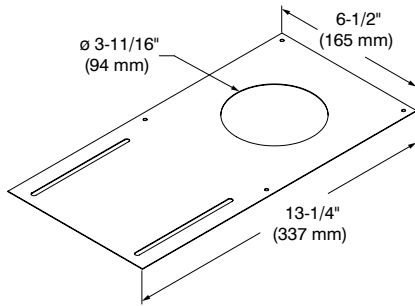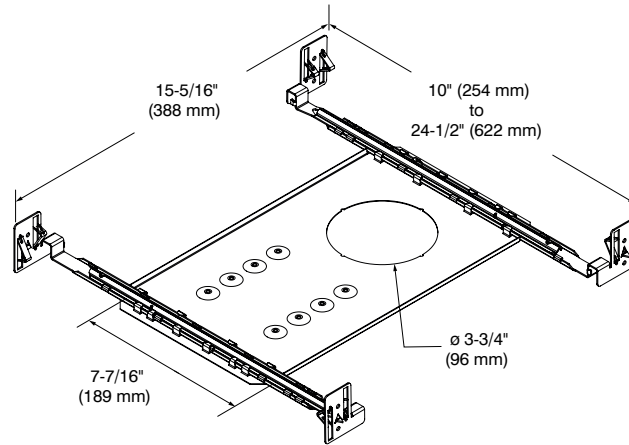**P3RN****P3RNW****GOOF RINGS**

For round trims.

Code: RR3-03SA (Satin Gold)
RR3-04BR (Brushed Chrome)
RR3-11 (Matte White)
RR3-12BR (Brushed Nickel)
RR3-13 (Satin Nickel)
RR3-22 (Matte Black)

Outside diameter: \varnothing 6-1/8" (156 mm)
Inside diameter: \varnothing 3-11/16" (94 mm)

For square trims.

Code: RS3-03SA (Satin Gold)
RS3-04BR (Brushed Chrome)
RS3-11 (Matte White)
RS3-12BR (Brushed Nickel)
RS3-13 (Satin Nickel)
RS3-22 (Matte Black)

Outside dimensions: 5" (127 mm) x 5" (127 mm)
Inside diameter: \varnothing 3-11/16" (94 mm)

OPENING ADAPTOR

For round trims only.

Can lip adaptor for 3-1/2" (89 mm) pot in a 4-1/4" (108 mm) opening.

Finish: Galvanized steel

Code: 312296

Outside diameter: \varnothing 4-5/16" (110 mm)
Inside diameter: \varnothing 3-5/8" (92 mm)

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.