




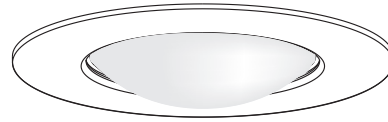




SPECIFICATION SHEET


4" 2000 SERIES

A2451S

LOW PROFILE SHOWER TRIM WITH FROSTED CONVEX LENS





	Wet Location YES
	Compact Fluorescent 13W, 18W or 26W
	PAR PAR20 35-50W
	Insulated ceiling housing ISCA2000, ISF2000L
	New construction housing NWF2000CAS, NWF2000LU13,18,26
	Remodel housing CA2000S, F2000L, F2000LU18,26
	Standard : Frosted lens Available : Clear lens (3), Frosted with clear center lens (4). To order, place the lens code after the trim code, before the « S ». Ex. : A2403S-01

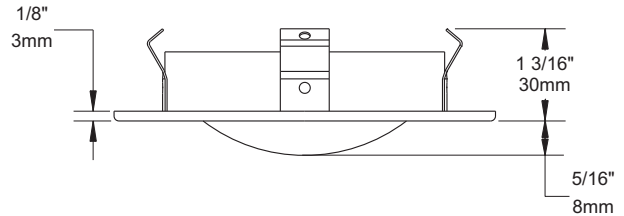

COMPATIBLE HOUSINGS

35W PAR20 ISCA2000	50W PAR20 CA2000S NWF2000CAS	13W CF F2000L ISF2000L
18W CF F2000LU18 ISF2000LU18 NWF2000LU18	26W CF F2000LU26 NWF2000LU26	

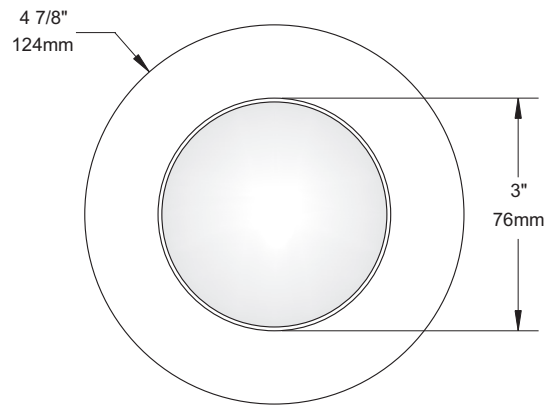



ENERGY STAR Requirements
120 Volt ONLY

This trim meets every ENERGY STAR requirements when combined with the following housings :

F2000LU18	F2000LU26	NWF2000LD26
NWF2000LU18	NWF2000LU26	

TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.

Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com



JUNE 2010