

IT3000LM

3 1/2" 3000 SERIES

Long Remodel Housing with Magnetic Transformer

SPECIFICATIONS

HOUSING DETAILS Up to 0,051" (1,3 mm) thick galvanized steel housing.
 Junction box can support up to 10 – 14 gauge wires or 8 – 12 gauge wires.
 Below-ceiling accessible.

MOUNTING **Cutout diameter: Ø 3 5/8" (92 mm)**
 Can fit in ceilings up to 7/8" (22 mm) thick.
 Requires a 7" clearance beyond the ceiling level.
 Patented hook (PAT#CAN 2,088,648 and #USA 5,377,088) for ease of installation and a perfect fit to ceiling.
 No light leakage.

LAMP **MR16 50W MAX**
 This product was designed for MR16 halogen lamps. If you want to use the dimming option and you replace the MR16 lamp by an equivalent LED lamp, please see dimmer compatibility list on our Website.

VOLTAGE IT3000LM: 120 VOLTS (CAN & É.-U.)
 IT3000LM2: 277 VOLTS (É.-U.)
 IT3000LM3: 347 VOLTS (CANADA)

TRANSFORMER **Magnetic Transformer**
 50 VA 120V / 12V
 50 VA 277V / 12V
 50 VA 347V / 12V

COMPATIBLE TRIMS	50W MR16				42W MR16	
	R3151	S3450	T3185	T3500	S3145D	
R3151W	S3500	T3200	T3500D	S3400D		
R3152	S3601	T3250	T3500W	S3450D		
R3171	S3651	T3250D	T3600	S3500D		
R3450D	T3000	T3260	T3602			
R3470	T3100	T3300	T3650			
R3601	T3125	T3400	T3652			
R3601W	T3145	T3400D	T3671			
R3602	T3145D	T3400W	T3700			
R3651	T3145DG	T3450	T3800			
R3651W	T3145W	T3450D	T3850			
R3652	T3152	T3450W	T3900			
S3145	T3165					
S3151						
S3400						

THERMAL PROTECTION TC 125°C

CERTIFICATION cULus **E17423** for damp locations



WARRANTY 5 years on LED driver

Project _____

Notes _____

Fixture Type _____


Date _____

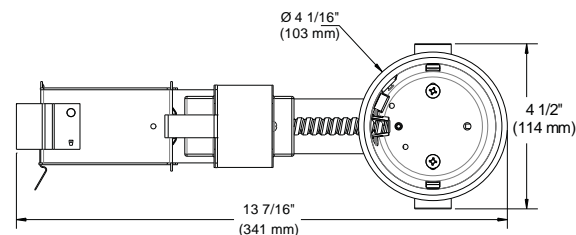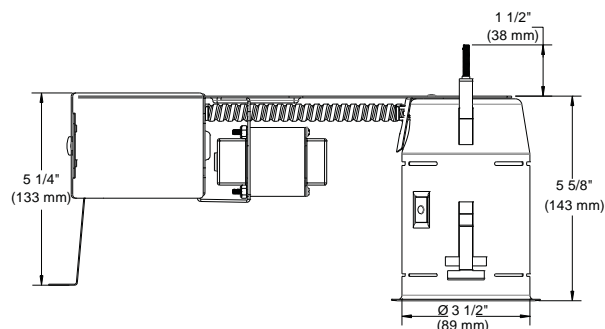

IT3000LM

3 1/2" 3000 SERIES

CODIFICATION EXAMPLE



ORDERING CODE

MODEL	SERIES	HOUSING HEIGHT	TRANSFORMER	VOLTAGE
IT	3000	L	M	
IT Remodel	3000 3 1/2" Series	L Long housing	M Magnetic	... 120 VOLTS 2 277 VOLTS 3 347 VOLTS

