

SPECIFICATION SHEET

REA4V

4" Series - Ardito


Remodel Housing

Project _____


Notes _____

Fixture type _____

Date _____

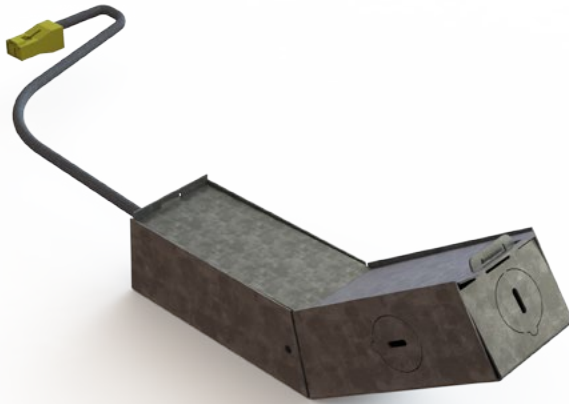

REA4V (illustrated)

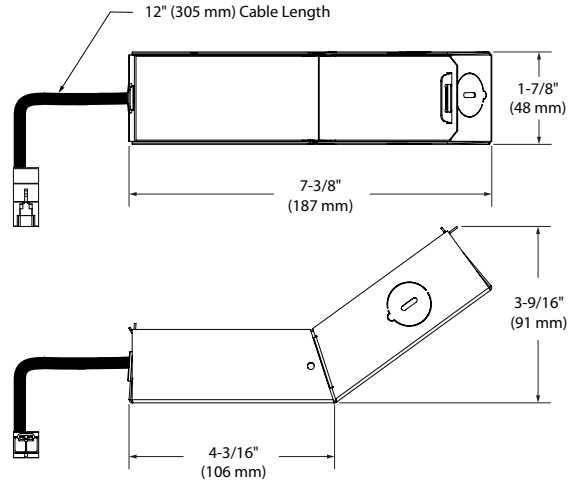

SPECIFICATIONS

HOUSING DETAILS	Galvanized steel housing. Junction box can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires). Below-ceiling accessible.
MOUNTING	Round Cutout Diameter: Ø 4-1/4" (108 mm) Square Cutout Diameter: 4-1/4" (108 mm) x 4-1/4" (108 mm) The ceiling level is determined by the choice of trims. Insulation material must be kept at least 3" (76 mm) away from the fixture.
PERFORMANCE	Performance 1: Up to 1,300 lumens (14W) Performance 2: Up to 1,900 lumens (23W) Lumenetix: Up to 700 lumens (12.5W)
POWER	120V - 277V
DIMMING	2 types of dimming offered: • Electronic Low Voltage (ELV) (120V only) • 0-10V (120V only) Due to constant evolution of dimmers we must test them regularly. We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com

COMPATIBLE TRIMS	Round Aperture			Square Aperture		
	Performance 1	Performance 2	Lumenetix	Performance 1	Performance 2	Lumenetix
	14W	23W	CT-WD	14W	23W	CT-WD
	A4RFR	A4RFR	A4RFR	A4SFR	A4SFR	A4SFR
	A4RAF	A4RAF	A4RAF	A4SAF	A4SAF	A4SAR
	A4RAR	A4RAR	A4RAR	A4SAR	A4SAR	A4SWW
	A4RWW	A4RWW	A4RWW	A4SWW	A4SWW	A4SAF
	A4RSF	A4RSF		A4SSF	A4SSF	

CERTIFICATION	cULus E343977 for damp and wet locations
WARRANTY	5 years on LED driver.

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.


SPECIFICATION SHEET

REA4V

4" Series - Ardito

Remodel Housing

CODIFICATION EXAMPLE




ORDERING CODE

MODEL	SERIES	DRIVER	PERFORMANCE
REA	4	V	
REA	Ardito Remodel Housing	4 4" Series	V ELV / 0-10V
			1 1,300 lumens 2 1,900 lumens L WD or CT

WD: Warm Dimming
CT: Color Tuning

MOUNTING PLATE OPTION

Code: PA4RNW (round)
PA4SNW (square)

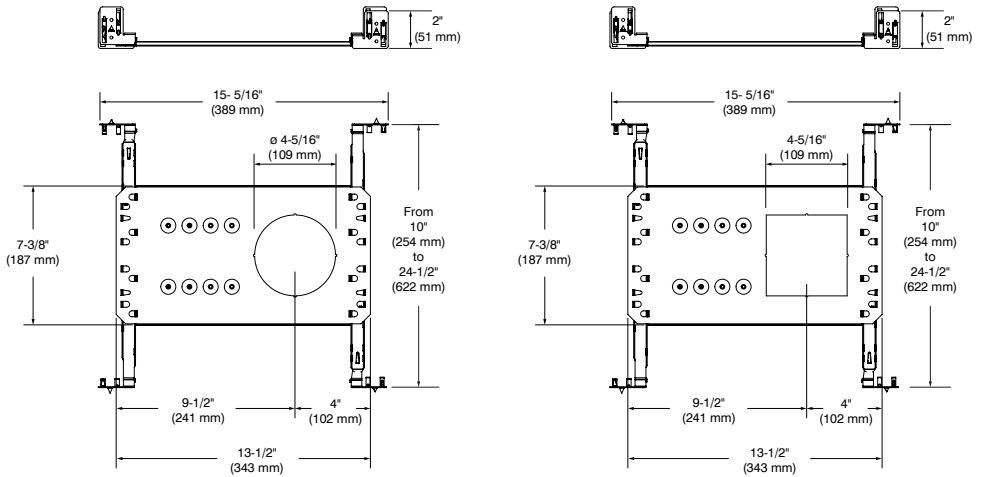


ROUND

SQUARE

MUD-IN-PLATE OPTION

Code: MIPA4R (round)
MIPA4S (square)

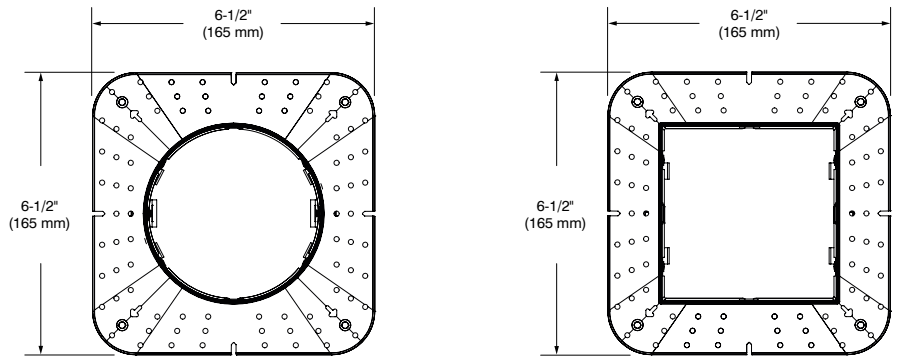

ROUND

SQUARE

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.